




MANUFACTURER OF  
SWIMMING POOL EQUIPMENT  
AND ACCESSORIES.

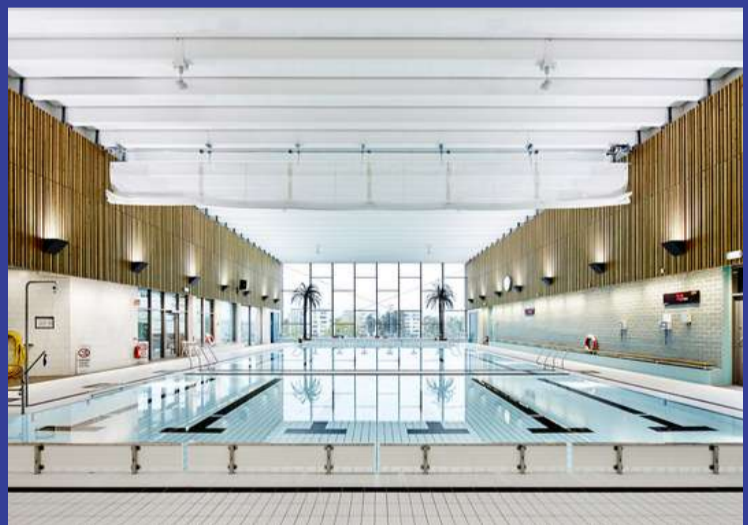

+91-9870166752  
+91-9560756662  
+91-9971664946

[info@dswswimmingpool.in](mailto:info@dswswimmingpool.in)

[www.dswswimmingpool.com](http://www.dswswimmingpool.com)

# POOL SIDE MOUNT SAND FILTER



**Top Mount Sand Filter**

## FEATURES:

The fiberglass winding design enables the filter to be durable, deforming-proof and corrosion resistant.

A unique and advanced design ensures fast draining and stabilizes water flow

The 6-position multiport valve with a user friendly handle easily provides you a maximum flow at low pressure drop.

The Sand filter comes with a precise pressure gauge.

- It is easy to install and to maintain.
- The Outlet turbidity is less than 2FTU.
- Working pressure is 2.5 Kg cm<sup>2</sup>/36 psi.
- UV resistance surface allows the filter to work under direct sunlight.
- Maximum operating temperature is 50°C.
- Smooth & High brightness appearance easy to clean.

## TECHNICAL INFORMATION

Code	Model	Design Flow m <sup>3</sup> /h	Filtration Area m <sup>2</sup>	Pipe Size Inch	Sand Req. Kg
HS36	HS900-36"	31.68	0.64	2.0	400
HS-40	HS1000-40"	39.10	0.79	2.0	500
HS-44	HS1100-44"	47.03	0.95	2.0	600
HS-48	HS1200-48"	55.94	1.13	2.0	950
HS-56	HS1400-56"	76.23	1.54	2.0	1350
HS-64	HS1600-64"	100	2.06	4.0	2300
HS-72	HS1800-72"	120	2.52	6.0	2900
HS-80	HS2000-80"	145	2.97	6.0	4000

## PRODUCT DIMENSIONS

Code	HS-36	HS-40	HS-44	HS-48	HS-56	HS-64	HS-72	HS-80
A	900	1000	1100	1200	1400	1600	1800	2000
B	530	540	540	660	770	1450	1610	1800
C	1020	1020	1200	1210	1350	810	850	900
D	142	142	142	142	142	1740	2040	2210